



EVERLAST®

SPORTS SURFACING

SURFACING FOR OFF-ICE AREAS EXPOSED TO HIGH ICE SKATE TRAFFIC



**Anti-Slip and
Blade-Resistant!**

ANTI-SLIP AND BLADE-RESISTANT:


Using only the finest quality recycled rubber and state-of-the-art technology, ECORE International manufactures rubber flooring for the most demanding situations at low cost. Everlast rolls are durable enough to withstand constant abuse and high traffic while providing comfort and safety.

AREAS OF APPLICATION:

- Locker rooms
- Pro shops
- Rink perimeters
- Walkways
- Game rooms
- Snack bars

PRODUCT ATTRIBUTES:

- Extremely durable
- Blade resistant
- Slip resistant even when wet
- Sound and shock absorbent
- Seamless appearance
- Custom graphic inlays
- Easy installation
- Made from recycled rubber
- Made in the U.S.A.

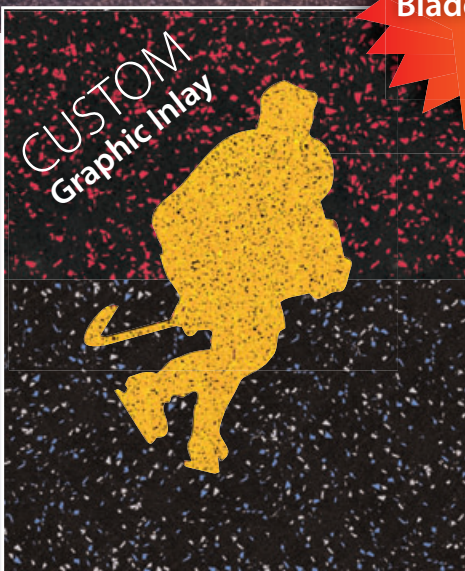

INSTALLATION

EVERLAST rolls installed in ice arena applications require a permanent full-spread adhesive system. For more detailed installation recommendations, please request an Everlast Installation and Maintenance Manual by calling 1-866-534-6085 or visit www.everlastsportssurfacing.com

ADHESIVE


ECORE International developed E-Grip™ III, an easy-to-use one-part polyurethane adhesive, for adhering Everlast flooring to various substrates with moisture content up to 5.5 lbs. Only an Ecore approved adhesive should be used. E-Grip III's coverage is approximately 95 sq ft/gal depending on substrate conditions and is available in 2 or 4 gallon pails.

MAINTENANCE

Most installations require only routine vacuuming and wet mopping with clean water and mild detergent or pH neutral solution.

WARRANTY

All flooring is guaranteed by Ecore to be free from manufacturing defects on both material and workmanship. If such a defect is discovered within three years under normal non-abusive conditions, the sole remedy against the seller will be the replacement or repair of the defective goods, or at the seller's option, credit may be issued not exceeding the selling price of the defective goods.

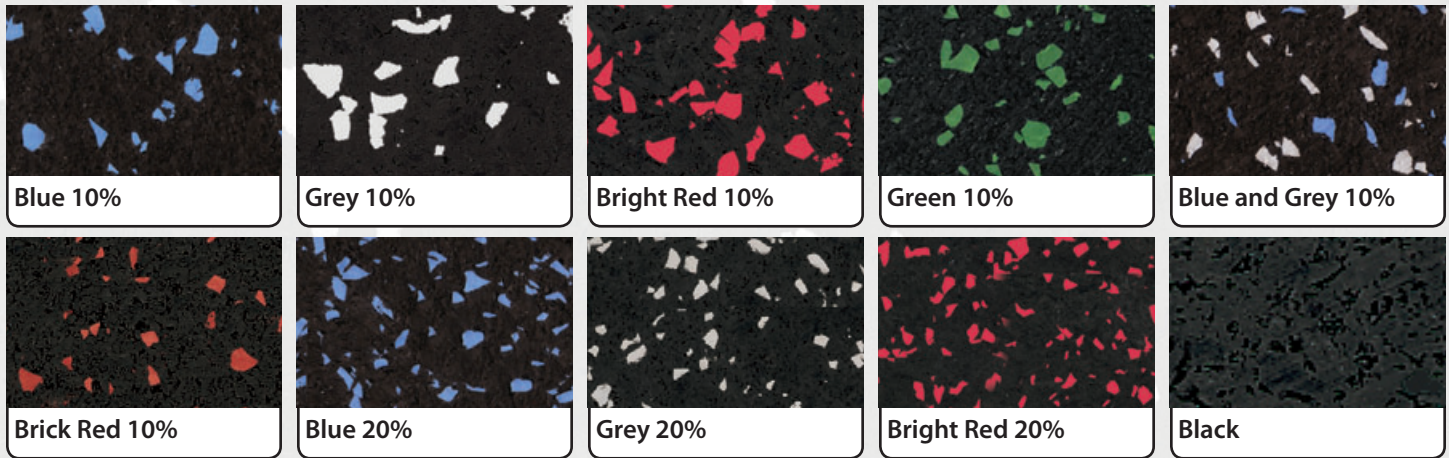

TECHNICAL INFORMATION

Product Dimensions

Everlast Rolls	Thickness	Weight (lbs/sq ft)
48" width	8 mm	1.73

Physical Data Test

	ASTM	Everlast 10% EPDM Rubber
Tensile Strength	D412	200 lb/in ² min
Flexibility	F137	Pass 1/4 inch madrel
Coefficient of Friction	D2047	>0.6
R-value	Calculated, C518	0.7 ft ² -°F-h/Btu
Static Load Limit	F970, 1,000 psi	<0.005 in
Chemical Resistance	F925	no charge
Impact Insulation Class	E492-04	54 min
Noise Reduction Coefficient	C423-08a	0.10
Elongation at Break	D412	75% min



Manufactured in the U.S.A. by:



1-866-534-6085 • www.everlastsportssurfacing.com