




E-Grip™ III

flooring adhesive

E-Grip III is a zero-VOC¹, very low odor single component polyurethane adhesive formulated specifically for use with E-CORE's family of surfacing products. E-Grip III features excellent trowelability and improved tack properties, so it's easy to apply and keeps seams flat and secure. Its moisture-cured, no-mix, non-sag, and permanently elastic formula has excellent adhesion to elastomers, concrete, and wood in both indoor and outdoor applications.

For more information on application specifications and usage with ECOsurfaces, EVERLAST, PlayGuard, or QT please contact your brand representative.

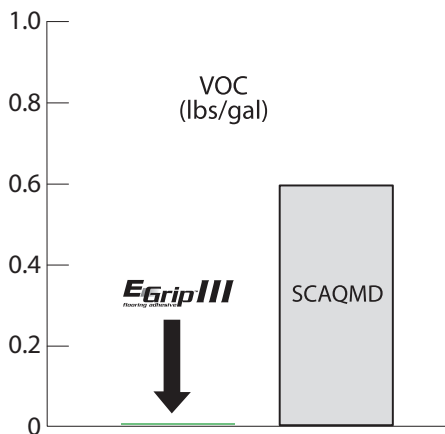

ADVANTAGES

- Zero-VOC¹ formula (SCAQMD Rule #1168)
- Easy to trowel and apply
- No mixing required
- Excellent curing cycle
- Very low odor
- Non-flammable
- Available in 2 gallon and 4 gallon pails, and 10.1 oz cartridges

¹ SCAQMD is the California "South Coast Air Quality Management District" Rule 1168 for adhesive flooring and sealant applications. The VOC content in E-Grip III complies with all adhesive applications listed by the SCAQMD.

PHYSICAL DATA

| | | | |
|-------------------------------|-------------------------------|---|---|
| Adhesive Type: | Single component polyurethane | Moisture Vapor Emission of Concrete Floor: | Maximum 5.5 lbs per ASTM F 1869 |
| Color: | Gray | Flashpoint: | > 500°F |
| Antimicrobial: | Yes | Shelf Life: | 12 Months |
| Adhesive Cure System: | Moisture-cured | Working Time: | 30-40 mins |
| VOC Content: | 0 (calculated) lbs/gal | Trowel: | 1/16" x 1/16" x 1/16" square notch |
| Solvents: | 0 (calculated) lbs/gal | Coverage: | 95 sq ft/gal - 1/16" notched trowel 60 sq ft/gal - 1/8" notched trowel |
| Freeze/Thaw Stability: | Stable | | |
| Application Temp: | 40°F to 100°F | | |

TECHNICAL DATA

For technical data please call 800.322.1923

Manufactured in the U.S.A. by:



715 Fountain Avenue • Lancaster, PA 17601 • (800) 322-1923